


## MSDCB SERIES

## CLUTCH BRAKE COMBINATION OPEN TYPE BRG. MOUNTED CLUTCH

BEARING MOUNTED CLUTCH-BRAKE COMBINATION WITH TWO ARMATURE PLATE AND SPIDER.

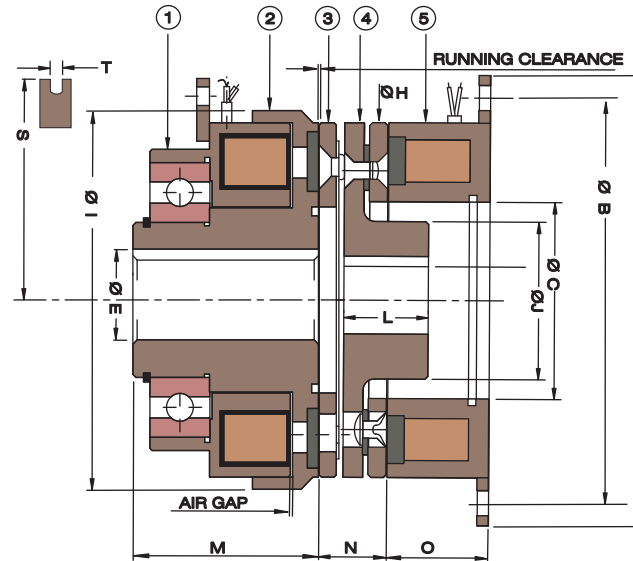

### PART LIST

1. CLUTCH BODY
2. ROTOR
3. ARMATURE PLATE
4. COMMON SPIDER
5. BRAKE BODY

Model	Torque (KgM)	Power (W)	OVERALL DIMENSIONS														
			A	B	C	D	E	H	I	J	L	M	N	O	R	S	T
MSDCB-0-BM-0.7	0.7	11	80	72	35	4.5X4	17	63	68	30	20	40	16	18	8	37	4.1
MSDCB-0-BM-1.5	1.5	15	100	90	42	4.5X4	20	80	85	40	20.5	43	21.8	20	12.6	46	4.1
MSDCB-0-BM-3	2.5	20	125	112	52	6.5X4	30	100	107	50	25	49	20	22	16.6	57	4.1
MSDCB-0-BM-6	5	25	150	137	62	6.5X4	35	125	134	50	26	55	22.4	22	19.6	71	4.1
MSDCB-0-BM-12	9	35	190	175	80	9X4	45	160	170	75	30	61	28.4	26	24.5	93	8.1
MSDCB-0-BM-20	20	45	230	215	100	9X4	60	200	214	95	38	74	44.8	30	45	113	8.1
MSDCB-0-BM-35	35	60	290	270	125	11X4	60	250	266	100	40	81	44.8	37	43	139	8.1

NOTE : 1. THE STANDARD VOLTAGE IS 24 VDC, OTHER VOLTAGES ON REQUEST, 2 ROTOR WILL BE SUPPLIED WITH THE PILOT BORE.