


MSDCB-O-BM SERIES

CLUTCH BRAKE COMBINATION OPEN TYPE BRG. MOUNTED CLUTCH

BEARING MOUNTED CLUTCH-BRAKE COMBINATION WITH TWO ARMATURE PLATE AND SPIDER.

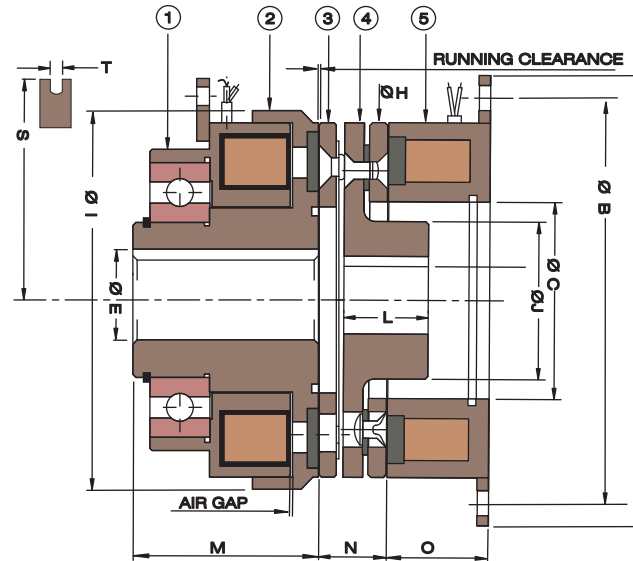

PART LIST

1. CLUTCH BODY
2. ROTOR
3. ARMATURE PLATE
4. COMMON SPIDER
5. BRAKE BODY

Model	Torque (KgM)	Power (W)	OVERALL DIMENSIONS														
			A	B	C	D	E	H	I	J	L	M	N	O	R	S	T
MSDCB-0-BM-0.7	0.7	11	80	72	35	4.5X4	17	63	68	30	20	40	16	18	8	37	4.1
MSDCB-0-BM-1.5	1.5	15	100	90	42	4.5X4	20	80	85	40	20.5	43	21.8	20	12.6	46	4.1
MSDCB-0-BM-3	2.5	20	125	112	52	6.5X4	30	100	107	50	25	49	20	22	16.6	57	4.1
MSDCB-0-BM-6	5	25	150	137	62	6.5X4	35	125	134	50	26	55	22.4	22	19.6	71	4.1
MSDCB-0-BM-12	9	35	190	175	80	9X4	45	160	170	75	30	61	28.4	26	24.5	93	8.1
MSDCB-0-BM-20	20	45	230	215	100	9X4	60	200	214	95	38	74	44.8	30	45	113	8.1
MSDCB-0-BM-35	35	60	290	270	125	11X4	60	250	266	100	40	81	44.8	37	43	139	8.1

NOTE : 1. THE STANDARD VOLTAGE IS 24 VDC, OTHER VOLTAGES ON REQUEST, 2 ROTOR WILL BE SUPPLIED WITH THE PILOT BORE.