


MSDCB-O-FM SERIES

CLUTCH BRAKE COMBINATION OPEN TYPE FLANGE. MOUNTED CLUTCH

CLUTCH-BRAKE COMBINATION OPEN TYPE FLANGE MOUNTED CLUTCH.

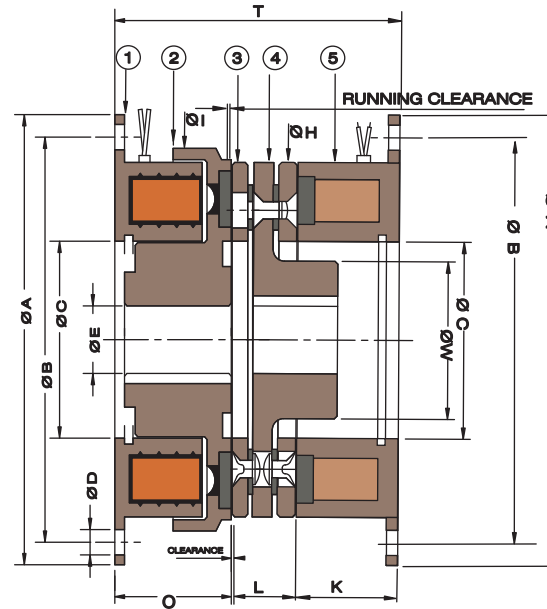

PART LIST

1. CLUTCH BODY
2. ROTOR
3. ARMATURE PLATE
4. COMMON SPIDER
5. BRAKE BODY

Model	Power (W)	Torque (KgM)	OVERALL DIMENSIONS											
			A	B	C	D	E	H	I	W	O	L	K	T
MSDCB-0-FM-0.3	8	0.16	60	52	18	4.3X3	10	45	45	17	20	13.7	17	51
MSDCB-0-FM-0.7	11	0.55	80	72	35	4.2X4	17	63	67	30	22	16	18	57
MSDCB-0-FM-1.5	15	1.15	100	90	42	5X4	22	80	85.5	40	24	22	20	68
MSDCB-0-FM-3	20	2.5	125	112	52	5X4	30	100	106	50	27	20.5	22.5	72.5
MSDCB-0-FM-6	25	4.5	150	137	62	6.4X4	40	125	133	50	30	22.5	24	79.5
MSDCB-0-FM-12	35	9	190	175	80	8.4X4	50	160	169	75	34	28.5	26	91
MSDCB-0-FM-20	50	20	230	215	100	8.4X4	65	200	215	95	40	45	30	117
MSDCB-0-FM-35	60	35	290	270	125	11X4	80	250	267	100	47	43	37	130

NOTE : 1. THE STANDARD VOLTAGE IS 24 VDC, OTHER VOLTAGES ON REQUEST, 2. ROTOR WILL BE SUPPLIED WITH THE PILOT BORE.