


FAIL SAFE BRAKES

(SPRING LOADED WITH ELECTROMAGNETIC AND MANUAL RELEASE)

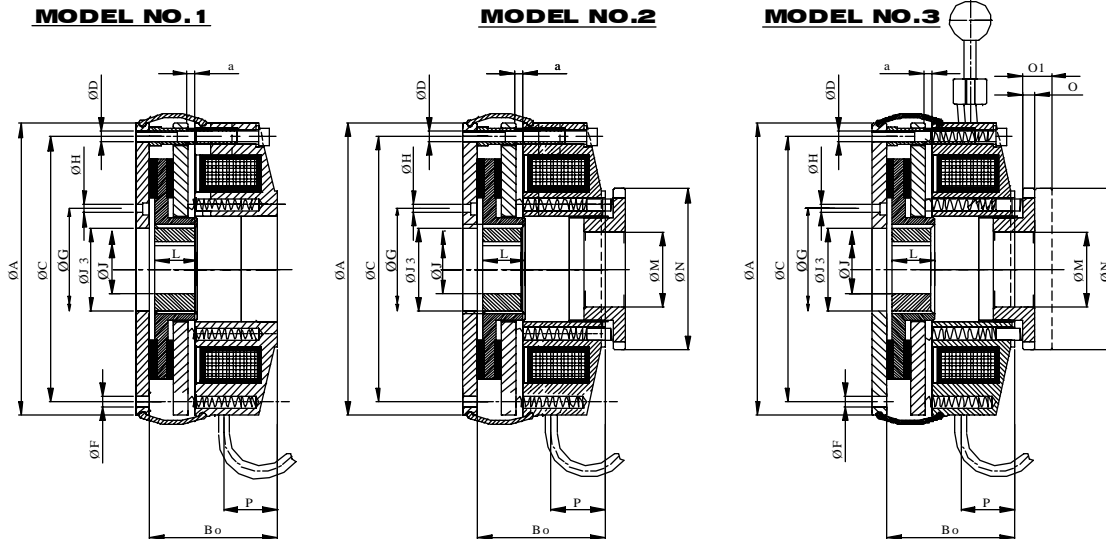

MODEL : MFSB

OVERALL DIMENSION

SIZE	0.4	0.8	1.6	3.2	6.0	8.0	15.0	24.0	36.0
POWER IN WATTS	20	25	30	40	50	55	65	75	100
TORQUE IN KGM	0.4	0.8	1.6	3.2	6.0	8.0	15.0	24.0	38.0
A	83	105	130	145	165	190	217	255	300
Bo	35.5	40	48	55	63.5	70.5	83	96.5	106.5
C	72	90	112	132	145	170	196	230	278
D	3 X M4	3 X M5	3 X M6	3 X M6	3 X M8	3 X M8	3 X M8	6 X M10	6 X M10
F	3 X 4.5	3 X 5.5	3 X 6.6	3 X 6.6	3 X 9.0	6 X 9.0	6 X 9.0	6 X 11.0	6 X 11.0
G	30	45	56	62	74	84	100	120	150
H	3 X 4.5	3 X 5.5	3 X 6.6	3 X 6.6	3 X 9.0	3 X 9.0	6 X 9.0	6 X 9.0	6 X 11.0
J ₃	20	30	40	45	55	65	75	90	120
L	18	20	20	25	30	30	35	40	50
M	18	22	33	40	48	56	64	73	95
N	50	54	70	82	94	104	118	136	166
O	4	4	5	6	7	7	6	7	9
O ₁	6	6.5	8.5	10	11.5	11.5	13	15	17
P	13.5	16	18	22	29	31	36.5	44	49
a (AIR GAP)	0.2	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.5
JH7 (Standard bores)	10	11,14	19,20	24,25	24,28,30	28,32,34	38,40,42	40,42,45,48	45,48,52,60
(Max. bores)	11	15	24	28	32	38	45	50	65

NOTE :

THE BORE CAN BE MADE AS PER PARTY'S REQUIREMENT.

KEYWAYS AS PER : I.S. SPECIFICATION

STD. VOLTAGES ARE 24 VDC, 42 V.D.C , 96 V.D.C , 190 V.D.C

OTHER VOLTAGES ON REQUEST