





MSDC SERIES


E.M. SINGLE DISK CLUTCH

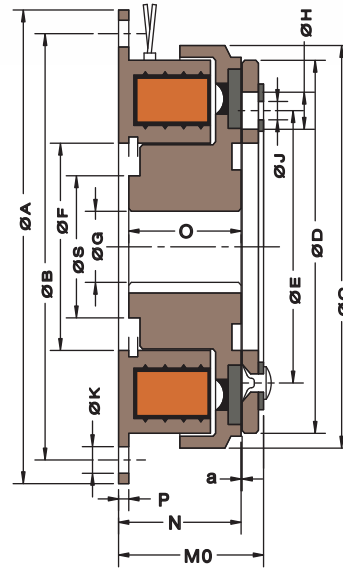

DESIGN 1.3

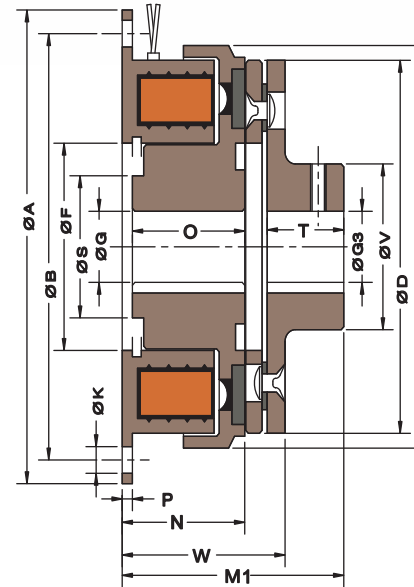

DESIGN 1.1

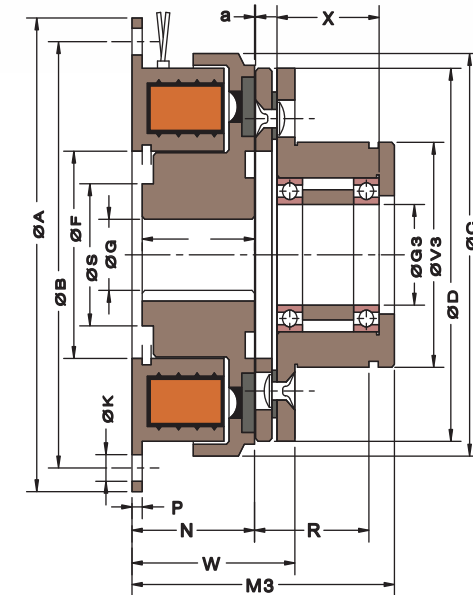

DESIGN 1.5

Model	Torque (KgM)	Power (W)	OVERALL DIMENSIONS																											
			A h9	B	C	D	E	F H8	G3	H	J	K	L	M0	M1	M3	N	O	P	P1	R	S	T	V	V3	W	X	a	G1	G3
0.7	0.7	15	80	72	68	63	46	35	12	3x6.3	3x3.1	4x4.5	3x5.5	28	43	51	24	22	2	3.5	22	23	15	28	38	31.5	20	0.2	17	17
1.5	1.5	21	100	90	85.5	80	60	42	15	3x8	3x4.1	4x5.5	3x7	31	51	60	26.5	24	2.5	4.3	30.5	28.5	20	33	45	35	23.5	0.2	20	20
3	3	29	125	112	107	100	76	52	20	3x10.5	3x5.1	4x6.6	3x9	36	60.9	70.9	30	27	3	5	37.9	40	25	43	55	40.9	30.5	0.2	30	30
6	6	36	150	137	134.5	125	95	62	25	3x12	3x6.1	4x6.6	3x10	41	70.5	86.5	33.5	30	3.5	5.5	50	45	30	50	64	46.5	42	0.3	40	35
12	12	50	190	175	170	160	120	80	30	3x15	3x8.2	4x9	3x13	47	84.5	103.5	37.5	34	4	6	63	62	38	66	75	53.5	54	0.3	50	40
20	20	69	230	215	214.5	200	158	100	40	3x18	3x10.2	4x9	3x16	55	103.4	125.4	44	40	5	7	78.4	77	48	84	90	64.4	64	0.5	65	60
40	40	86	290	270	266.5	250	210	125	45	4x22	4x12.2	4x11	4x20	64	118.9	144.9	51	47	6	8	88.9	100	55	106	115	74.9	76	0.5	80	80

NOTE : 1. THE STANDARD VOLTAGE IS 24 VDC, OTHER VOLTAGES ON REQUEST, 2 ALUMINIUM HUB(SPIDER) CAN BE SUPPLIED AS PER CUSTOMER'S REQUIREMENT.